

# AD.5.L... LEVER OPERATED TYPE VALVES CETOP 5/NG10



1



AD.5.L...

ORDERING CODE	CH. I PAGE 24
STANDARD SPOOLS	CH. I PAGE 25


Max. pressure ports P/A/B	320 bar
Max. pressure port T	160 bar
Max. flow	100 l/min
Lever angle	2 x 15°
Fluid viscosity	10 ÷ 500 mm <sup>2</sup> /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter β <sub>25</sub> ≥ 75
Weight	4,7 Kg
Weight with M1 variant	5,35 Kg

- Possible mounting: **C / E / F**
- There is no **D** type mounting
- The variant **D1** specifies the detent (mechanical connection) for lever operation
- The springs for the version with detent (variant **D1**) are different from those for standard versions.
- Ordering code see page 1•24

- Completely different spools are used for these (lever operated) valves than for all other types of operation (e.g. electrical, mechanical, pneumatic operation, ecc..)
- Available spools: 01 / 02 / 03 / 04 / 05 / 06 / 66 / 07 / 22 / 13 / 15 / 16 / 17 (see page 1•25)
- Available on request NATIONAL AM1107 type microswitch

## OVERALL DIMENSIONS

M1 = Microswitch

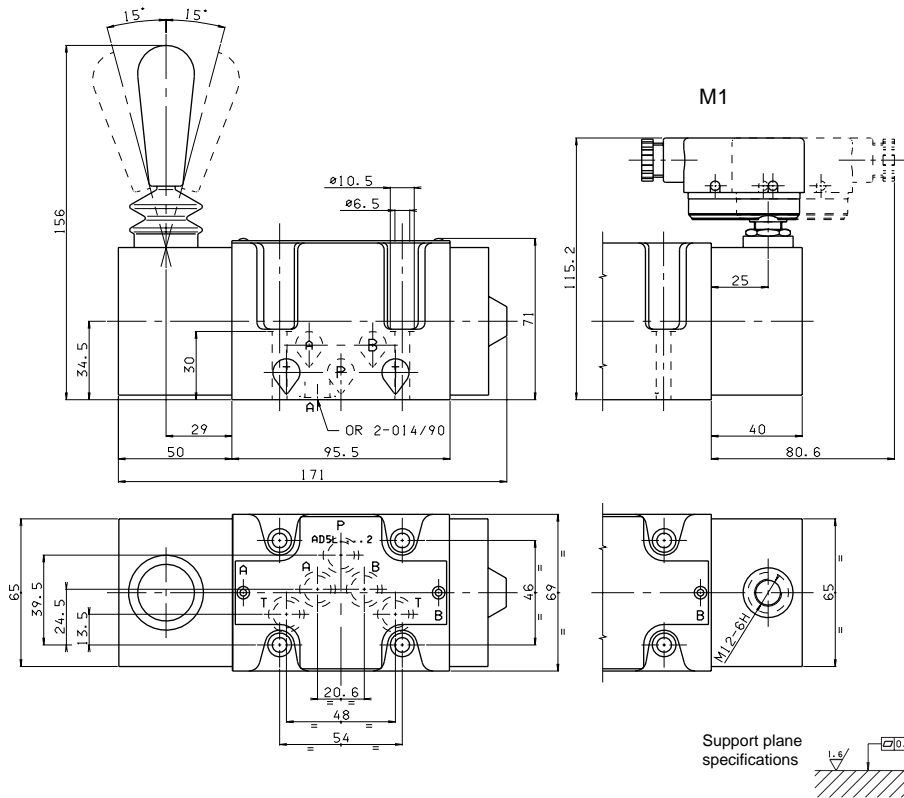

Fixing screws UNI 5931 M6x40  
with material specification 12.9  
Tightening torque 8 Nm / 0.8 Kgm

