


ADH.7... 4/3 AND 4/2 PILOTED VALVES CETOP 7/NG16



1

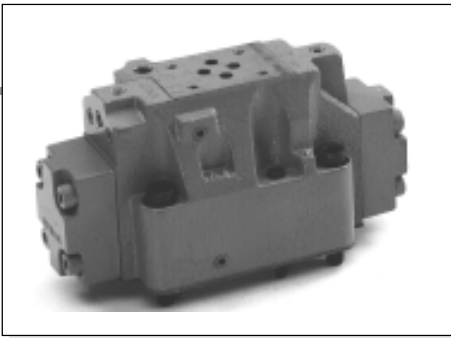

ADH.7...

STANDARD SPOOLS FOR ADH.7	CH. I PAGE 48
ADH.7...	CH. I PAGE 49
BSH.7...	CH. I PAGE 50/51
CETOP 3/NG06	CH. I PAGE 8
STANDARD SPOOLS FOR AD.3.E	CH. I PAGE 10
AD.3.E...	CH. I PAGE 11
D15 DC COIL	CH. I PAGE 20
K12 AC SOLENOID	CH. I PAGE 20
STANDARD CONNECTORS	CH. I PAGE 21

Type ADH.7 distributors are intended for interrupting, inserting and diverting a hydraulic system flow. Normally these distributors are composed of a main stage, crossed by the circuit main flow, and of a pilot stage available in several versions.

Various types of controls are available, used either individually or in combination for, among other functions, stroke limitation and main spool movement speed control, in order to optimize the hydraulic system operation where this type of valve is employed.

In those cases where normally to drain spools are used, it is necessary to remember that the minimum changeover pressure due to the opposing springs is equal to approximately 5 bar (see the operating features table next pages) and it is consequently necessary to specify when ordering the check valve incorporated in the P line, if required (as shown below).

- Mounting surface in accordance with CETOP 4.2-4-07-320 and/or UNI ISO 4401-AD-07-4-A1
- Pilot operated spool, solenoid controller
- Stroke control of main spool
- Pre-setting for pressure reducing valve mounting
- Pre-setting for single-acting throttle valve mounting

ORDERING CODE

ADH	Piloted valve (Pilot valves and any modulating valves should be ordered separately)
7	CETOP 7/NG16
*	Mounting type (see next page)
**	Spool type (see next page)
*	Piloting and draining I = X internal / Y internal IE = X internal / Y external EI = X external / Y internal E = X external / Y external (see Tab.1 at side and Tab. 2 below)
R	Check valve incorporated at port P (setting 5 bar) Only for I and IE versions (omit if not required)
**	00 = No variant LC = Main spool stroke limiter
1	Serial No.

Tab.1 - SPRINGS ARRANGEMENT FOR THE PILOT AND DRAIN LINES

Springs type used: M6x6 both for pilot and drain


<p>ADH.7...I X internal piloting Y interno draining</p>
<p>ADH.7...IE X internal piloting Y external draining</p>
<p>ADH.7...EI X external piloting Y internal draining</p>
<p>ADH.7...E X external piloting Y external draining</p>

Tab. 2 - INTERNAL CHECK ON P

<p>• For the spools 02-04-14-28 the piloting is normally external; the internal piloting is possible with the internal check valve (R).</p>

1

PRESSURE DROPS

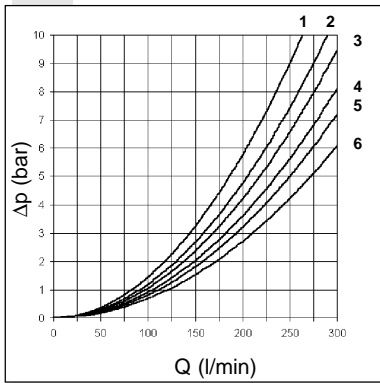

The diagram shows the pressure drops in relation to spools adopted for normal usage (see table).

The fluid used was a mineral based oil with a viscosity of 35 mm²/s at 50°C.

Spool type	Connections					
		P→A	P→B	A→T	B→T	P→T
01	ENERGIZING	1	1	2	3	
02	DE-ENERGIZ. ENERGIZING	5	5	1	2	6 ⁽¹⁾
03	DE-ENERGIZ. ENERGIZING	1	1	4 ⁽²⁾ 1	4 ⁽²⁾ 2	
04	DE-ENERGIZ. ENERGIZING	6	6	3	4	6
05	DE-ENERGIZ. ENERGIZING	4 ⁽²⁾ 5	4 ⁽²⁾ 5	2	3	
66	DE-ENERGIZ. ENERGIZING	1	1	2	4 2	
10	ENERGIZING	1	1	2	3	
14	DE-ENERGIZ. ENERGIZING	6	6	3	4	6 ⁽²⁾
28	DE-ENERGIZ. ENERGIZING	6	6	4	3	6 ⁽²⁾
23	DE-ENERGIZ. ENERGIZING	1	4 5	2	3	
Curve No.						
Notes: ⁽¹⁾ A/B stopped - ⁽²⁾ B stopped - ⁽³⁾ A stopped						

SPOOLS AND MOUNTING TYPE

(* Spools with price increasing)

(*) For the E mounting the locating spring works only with the steady system

	C mounting	A mounting	B mounting	E mounting (*)	P mounting
Pilot Piloted	AD.3.E.03.C... ADH.7.C...	AD.3.E.03.E... ADH.7.A...	AD.3.E.03.F... ADH.7.B...	AD.3.E.16.E... ADH.7.E...	AD3E16E/AD3E16F ADH.7.P...
Scheme					
Spool type	A X P T Y B	A X P T Y B	A X P T Y B	A X P T Y B	A X P T Y B
01					
02					
03					
04*					
05					
66					
10*					
14*					
28*					
23					

PILOTE SOLENOID CONTROL VALVE SPECIFICATION

FOR DIFFERENTS CONTROLS, PLEASE CONCTAT OUR TECHNICAL ARON SERVICE

Max. operating pressure ports P/A/B	320 bar
Max. operating pressure port T (int. drainage)	160 bar
Max. operating pressure port T (ext. drainage)	250 bar
Max. piloting pressure	210 bar
Min. piloting pressure	5 bar
Max. flow with 04-14-28 spools	250l/min at 210 bar 200l/min at 320 bar
Max. flow with all other spools	300l/min at 210 bar 250l/min at 320 bar
Piloting oil volume for engagement 3 position valves	4 cm ³
Piloting oil volume for engagement 2 position valves	8 cm ³
Hydraulic fluid	mineral oil DIN 51524
Fluid viscosity	2.8 ÷ 380 mm ² /s
Fluid temperature	-20°C ÷ 70°C
Ambient temperature	-20°C ÷ 50°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Weight ADH7 without pilot valve	7,2 Kg
Weight ADH7 with pilot valve with 1 AC solenoid	8,4 Kg
Weight ADH7 with pilot valve with 1 DC solenoid	8,6 Kg
Weight ADH7 with pilot valve with 2 AC solenoids	8,7 Kg
Weight ADH7 with pilot valve with 2 DC solenoids	9,2 Kg

Switching time



Such values refer to a solenoid valve with P = 100 bar pressure using a mineral oil at 50°C with 36 mm²/sec viscosity PA and BT connections.

SWITCHING TIMES PILOTED VALVE


Solenoids	ENERGIZING ±10% (ms)		DE-ENERGIZING ±10% (ms)	
	2 posit.	3 posit.	2 posit.	3 posit.
AC	60	40	80	60
DC	70	50	80	60

OVERALL DIMENSIONS

CETOP 7 MOUNTING SURFACE

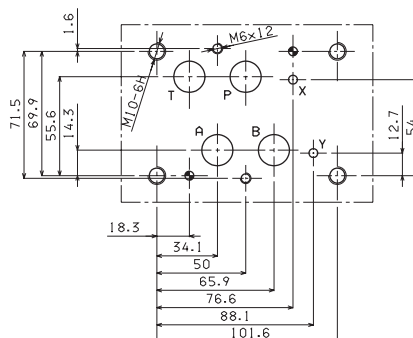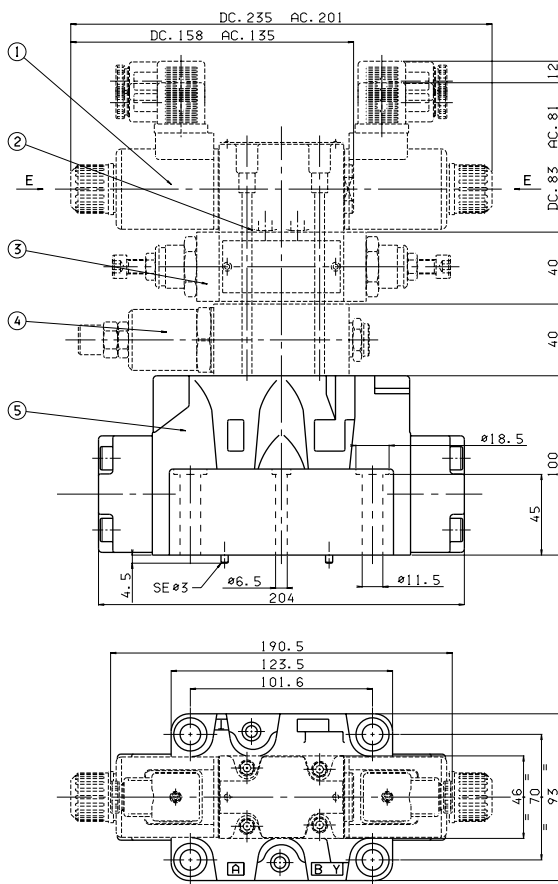

- Piloted valve fixing:
n° 4 screws T.C.E.I. M10x60 - Tightening torque 40 Nm
n° 2 screws T.C.E.I. M6x60 - Tightening torque 8 Nm
- Seals:
n° 4 OR 2-118 PARKER (type 130)
n° 2 OR 2-013 PARKER (type 2043)

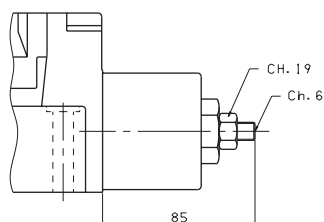

SPOOL STROKE ADJUSTMENT

- 1 Piloted solenoid valve type AD3E... CETOP 3/NG6
- 2 Calibrated diaphragms AD3E...
- 3 Flow regulation valve type AM3QF..C
- 4 Pressure reduction valve type AM3RD..C
- 5 Main valve type ADH7..E